

XT6 XTREME THIN

6 LED LIGHTHEAD (Surface Mount)



FEATURES

- New Generation Xtreme optic for wide angle visual and classic aesthetics.
- SAE and ECE R65 certified high power output.
- ECE R10 EMC Compliance.
- 0.39" (10mm) Super low-profile thickness.
- Long life LEDs rated to 100,000 hours of operation.
- Non-volatile memory recalls last flash pattern used at power up.
- Multi-units synchronization in simultaneous or alternating flash.
- Reverse polarity protection.
- Weatherproof and vibration resistant design for internal or external use.
- Solid aluminum base for efficient heat dissipation.

SPECIFICATIONS

Meets: ECE R65 (XA1, XB1)
ECE R10
SAE J595 Class 1
CA Title 13 (R, B)
IPX8

Bulb: High-power LED x 6pcs

Warning Patterns: 16 Flash Patterns

Operating Voltage: 12~24VDC

Avg. Current: 0.44A @12VDC / 0.22A @24VDC
(varies with flash pattern)

Avg. Power: 5.3 Watts (varies with flash pattern)

Max. Current: 0.88A @12VDC / 0.44A @24VDC

Max. Power: 10.6 Watts

Wires: Red-Vcc : 25cm (20AWG)


Black-GND : 25cm (20AWG)

Yellow-Sync & Functions : 25cm (20AWG)

Fuse Recommended: 1A

Available in: RED , BLUE , AMBER , WHITE

DIMENSIONS

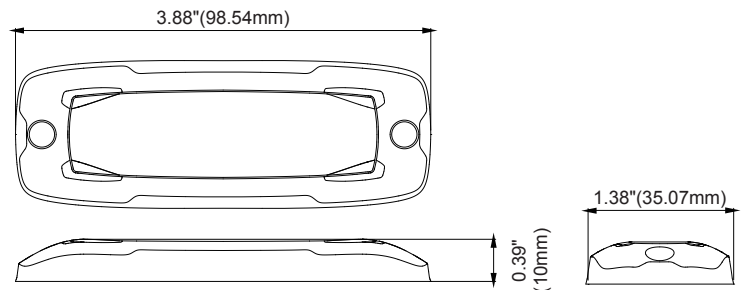

PART NO.

- M60-01y3B-00R (R65 BLUE)
- M60-00y3B-00R (SAE BLUE)
- M60-00y3R-00R (SAE RED)
- M60-01y3C-00R (R65 AMBER)
- M60-00y3C-00R (SAE AMBER)
- M60-00y3W-00R (SAE WHITE)

Replace "y" for

0: Black Flange / 1: White Flange / 2: Chrome Flange

FLASH PATTERN

| Flash Patterns | | | |
|----------------|-------------------|----|--------------------|
| 1 | Double(R65) | 9 | Double (SAE) |
| 2 | Single(2Hz) | 10 | Triple (SAE) |
| 3 | Triple(2Hz) | 11 | Quad (SAE) |
| 4 | Quad(2Hz) | 12 | Quint (SAE) |
| 5 | Random | 13 | Ultra (SAE) |
| 6 | Steady | 14 | Single-Quad |
| 7 | Single(SAE)(CA13) | 15 | Single H/L |
| 8 | Mega | 16 | Singe-Triple-Quint |

FLANGE KIT

99.M60X2.000
(FLANGE, CHROME)



99.M60X1.000
(FLANGE, BLACK)



99.M60X0.000
(FLANGE, WHITE)

