



E-EFS-0901-90-120



10 Port Desktop Switch with 8 PoE Ports

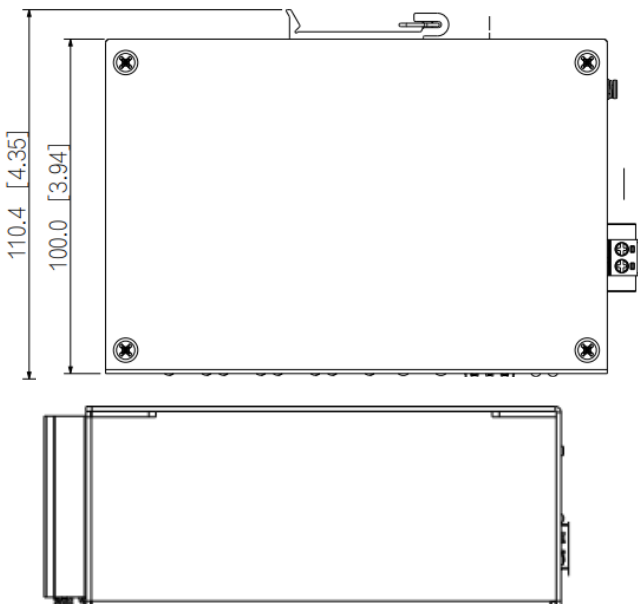


Dimensions mm (inch)

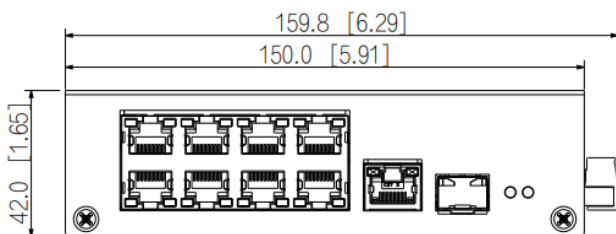

Panels

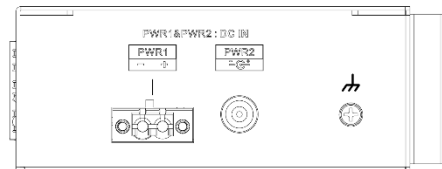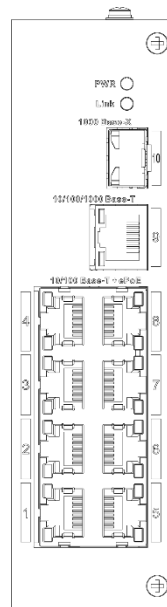

Installation method

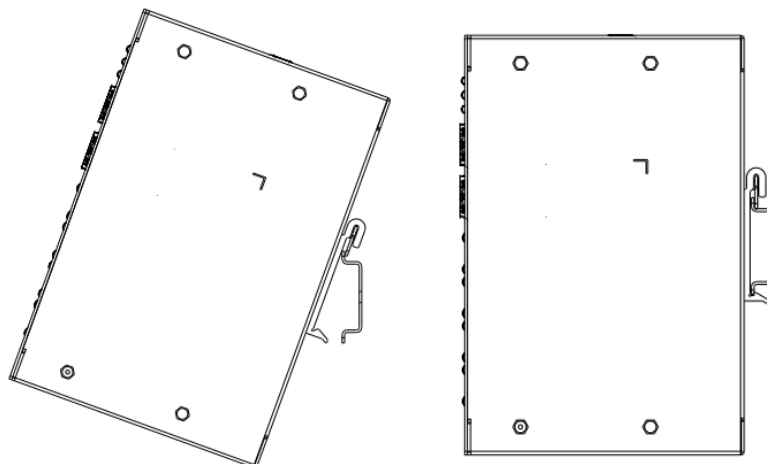

Technical Specification

Hardware

Included Power Adapter	Yes
PoE	Yes
Ethernet Port	8
Ethernet Port Speed	10/100 Mbps
Ethernet Port Uplink Speed	10/100/1000 Mbps
Optical Port Uplink Speed	1 Gbps
Description of Function Slots	Port 1-8: 8 × RJ-45 10/100 Mbps Port 9: 1 × RJ-45 10/100/1000 Mbps Port 10: 1 × SFP 1000 Mbps
Power Supply	External power supply: 54 VDC, 2.22 A
Operating Temperature	-30 °C to +65 °C
Operating Humidity	10%–90% (RH), non-condensing
Power Consumption	Idling: 3.2 W Full load: 120 W

Performance

Layer	Layer 2
Management Type	No
Smart Managed Switch	No
Switching Capacity	8.8 Gbps
Packet Forwarding Rate	5.36 Mpps
Packet Buffer Size	2.75 Mbit
Jumbo Frame	9216 Byte
MAC Table Size	8K Byte
Communication Standard	IEEE802.3, IEEE802.3u, IEEE802.3ab/z, IEEE802.3X

Feature

PoE Protocol	IEEE 802.3af; IEEE 802.3at; Hi-PoE; IEEE 802.3bt
PoE Power	Port 1,5 ≤90 W Port 2,3,4,6,7,8 ≤30 W Total ≤120 W
PoE Pin Assignment	1,2,4,5 (V+),3,6,7,8 (V-)
ePoE	Yes
Long Distance PoE Transmission	Yes

General

Statics Protection	Air discharge: 8kV Contact discharge: 6kV
Lighting Protection	Common mode: 4 kV Differential mode: 2 kV
Net Weight	0.6 kg
Gross Weight	1,9 kg
Product Dimensions	190 mm × 100 mm × 30 mm
Packaging Dimensions	265 mm × 238 mm × 76 mm
Casing Material	Iron
Installation	Rack mount; DIN guide rail mount
Certifications	CE; FCC