


# R-VWC0104-R PLUS

Erbu HDMI Video Wall Controller

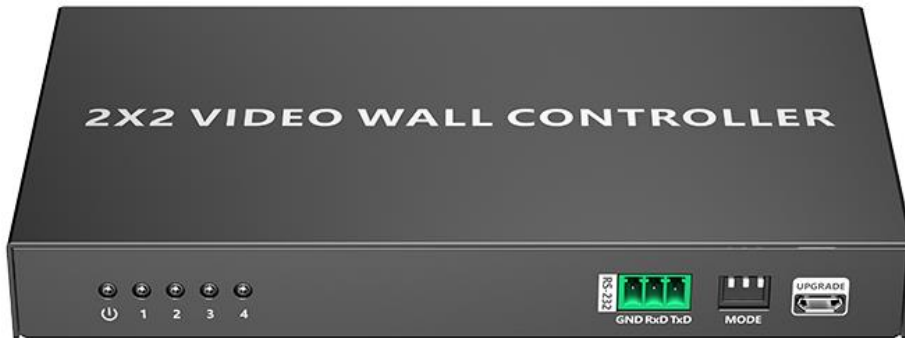

## Technical Specification

Items	Description	
Video Signal	HDMI Input	1x HDMI
	HDMI Output	4x HDMI
	Compatibility	HDMI 1.4 HDCP 1.4
	Resolutions	1080P@60/50/30/25/24Hz, 720P@60/50Hz, 576P@50Hz, 480P@60Hz, 1920x1200@60Hz, 1680x1050@60Hz, 1600x900@60Hz, 1600x1200@60Hz, 1440x900@60Hz, 1400x1050@60Hz, 1366x768@60Hz, 1360x768@60Hz, 1280x1024@60Hz, 1280x960@60Hz, 1280x800@60Hz, 1280x768@60Hz, 1024x768@60Hz, 800x600@60Hz, 640x480@60Hz
Video Signal	3,5 mm Output	PCM
	HDMI Output	PCM
Splice Settings	Mode	1x1/2x1/1x2/2x2/3x1/1x3/4x1/1x4
	DIP Switch	Default baud rate: 9600 Only when the dip switch is set to '111' can the splicing mode be switched by RS-232 instruction
Power	Power Supply	DC5V/1A
	Power Consumption	<4W
Operating Environment	Working temperature	-20°C~60°C
	Storage temperature	-30°C~70°C
	Humidity	0~90%RH (No condensation)
Physical Properties	Housing	Iron
	Weight	381g
Physical Properties	Color	Black
	Dimensions	160(L)*90(W)*20.6(H)mm
Protection	ESD protection	1a Contact discharge level 2 (±4KV) 1b Air discharge level 3 (±8KV) Implementation of the standard: IEC61000-4-2
		Lightning protection, Surge protection