

Technical Specifications

TUNER

RDS World Tuner FM Band (87.5 – 108MHz) AM (MW) Band (522 — 1620KHz) PTY / TP /TA (Traffic Announcement) AF (Alternative Frequency) Preset Station Memory 18x FM, 12x AM

PLAYBACK

MP3 / WMA ID3 Tag (Artist / Album / Track) Repeat / Random Play

AMPLIFIER

Music Power Max. Mosfet 50W x 4 Bass / Treble Fader / Balance Multi-Band EQ (8 Presets)

DISPLAY

LCD (8 Segment) White Color Display

BUTTON

RED Button Illumination

PROTECTION

Detachable Front Panel

Wiring Diagram

BLUETOOTH FUNCTION

Phone Pairing & Hands-Free Car Kit A2DP Audio Streaming BT 2.0 Standard 3 Meters Range (free space)

CONNECTION


ISO Connector (built-in) DIN Female Connector (built-in) USB 1.1 & 2.0 (500mA) SD/SDHC reader Front AUX In RCA (Rear /2.5V) - Sub out

GENERAL

Temperature Range -30° to +85°C Power Supply 12V DC 15A fuse built-in Speaker impedance: 4-8 Ohm

PACKAGING

214mm x 97mm x 207mm (gift box) 1.2 Kg Front Panel with Carrying Case Owner's Manual (DE/EN/IT) Mounting Tools

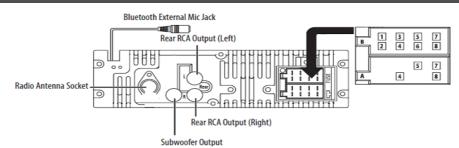

Pin	Color and function		Pin	Color and function	
A4	Yellow	Battery (+)	B1/B2	Violet ⊕/Violet/Black ⊖	Right rear speaker
A5	Blue	Connect to system control terminal of the power AMP or auto antenna relaycontrol terminal (Max 150MA 12VDC)		Grey ⊕/Grey/Black ⊖	Right front speaker
A7	Red	Ignition (ACC)	B5/B6	White⊕/White/Black⊖	Left front speaker
A 8	Black	Ground	B7/B8	Green ⊕/Green/Black ⊖	Left rear speake



CALEARO ANTENNE S.p.A. Via Bacchiglione, 49 - Z.I. Fossanigo Nord 36033, Isola Vicentina (VI) - ITALY Tel. (+39) 0444 901311 - Fax (+39) 0444 901375

All right reserved Calearo antenne Spa may make changes or improvements in the present document in any moment and without any notice