

# 4.3 Inch DIGITAL WIRELESS BACKUP CAMERA SYSTEMS

User Manual / Installation Instructions



Car



Pickup



SUV



Mini RV

Before installing please read the manual  
Subject to the actual product

## System Features

1. Custom Kit System for Convenient Parking Assistance.
2. Includes All Necessary Cables & Wiring for Installation.
3. This is ideal for cars, trucks, SUV, UTV or any vehicle(Less than 30 feet) where you want to add a backup camera or see front/side/under vehicle.
4. Quick and simple setup.
5. System can be installed to turn on only when vehicle is in reverse, Or wired for continuous viewing. This is based on your connection method.
6. The display can be mounted on the dashboard or windshield.
7. New Smart Switch comes with 6 functions including on/off guide lines,flip images mirrored/facing/horizontal flip/vertical flip, adjust the width/length/downward angle for guide lines.

## What You Get

### > What's in the Box



01. 5inch Monitor

03. Bracket

06. Antenna

04. Cable

07. Cable

02. camera

05. Car Charger

08. Accessories



**NOTE:** The contents included may be different based on the kit you purchased. Please take the actual product as standard.

## Wiring Instruction:

We recommend doing a benchmark test before installation to ensure that all components are working properly.

- Powered by the cigarette lighter using the adapter (on/off) for continuous driving use. Be sure to insert the red and black wire appropriately +/- and tighten the screws to hold firmly in place.



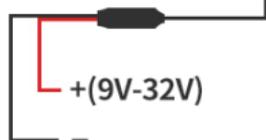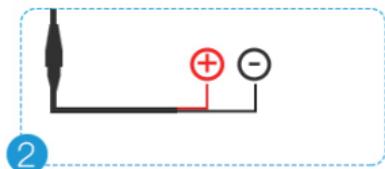

monitoring: Camera connection the ACC power  
Reversing: Camera connect the reversing light

## Monitor installation:

The monitor equipped with bracket. You can install the monitor on the dashboard or windshield as you like.

## Monitor Operation:

### Key Function




	Menu not opened	Menu Open
<b>+:</b>	Short press: Real time screen to turn on/off the reverse ruler, no screen or function Long press: No function	Short press: mode plus Long press: No function
<b>Menu:</b>	Short press: Open menu settings Long press: Enter/exit code matching mode	Short press: Confirm and enter the next menu setting Long press: Enter/exit code matching mode
<b>-:</b>	Short press: No function Long press: No function	Short press: Mode decrease Long press: No function
<b>Flip:</b>	Short press: Real time screen adjustment of imaging direction Long press: No function	Short press: Confirm and exit the menu Long press: No function
<b>Power:</b>	Short press: Turn on/off Long press: No function	Short press: Turn on/off Long press: No function

## Guidelines Adjustment


➤ If you pressing the “Menu” key for 1 second, it will enter the guidelines adjustment mode. You will see the interface shown below.

When you see the red H icon on the display, it means that the reverse guidelines can move on the screen. Then you can click on the + or - key, the guidelines will move right or left.

➤ Click on the Menu key, and you will see the icon switch to V. This means that you can move the reverse guidelines up and down

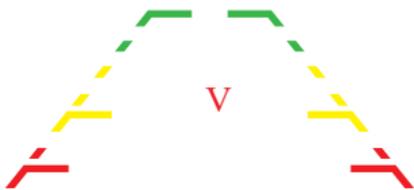

➤ Click on the Menu key. When you see the icon switch to W, it means that the guidelines width can be adjusted. Then you click on the + or - button to adjust the line width.

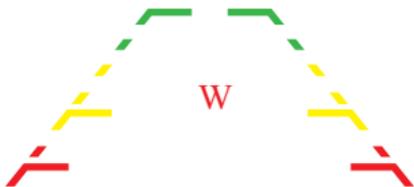

## 4.3 Inch Monitor Specification

LCD Size:	4.3 Inch Color Monitor
Resolution:	480*272
Power Supply:	DC9V-32V
Operating temperature:	-10°C~+70°C
Storage temperature:	-20°C~+80°C

## Backup Camera Specification

Waterproof Rating:	IP68
TV System:	NTSC/PAL
Resolution:	720P
View Angle:	125°[H] 150°[D]
Power Supply:	DC 12V-32V
Operating temperature:	-10°C~+60°C
Storage temperature:	-20°C~+80°C